

**Specification**


Model	MSR-A2410B
Frequency (PLL) MHz	2413 , 2432 , 2451 , 2470
Frequency Deviation	200 kHz
Video input	1Vp-p 75ohm
Audio input	2Vp-p 10k ohm
Audio sub carrier	5.5 MHz
Operating voltage	DC 12V
Operating currier	350 mA
Operating temperature	-10 ~ 40 Degrees C
Operting humidity	20 ~ 80%
Dimension (mm)	114 x 80 x20
Weight (g)	165



MSR-A2410B


**MRX-(2400,1200,0900)B**

- Receivers will automatically receive new signals from any one of newly added cameras. Producing clear audio affect and stable video effect.
- Receivers can be adjusted to mute mode or changed intervals of scanning.
- POWER:Li-Ion Rechargeable Battery or DC 5 V  
Using compatible Nokia cell phone battery BL-5C
- 2.4GHz Wireless receiver + auto-switcher + metal housing.
- 4CH & Auto Switcher
- Low Power & channel LED Display

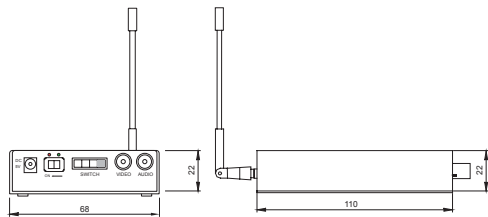

**MSR-(A2410, C0910)B**

- 2.4GHz Wireless receiver + metal housing.
- Receivers can be adjusted to mute mode or changed intervals of scanning.
- Receivers will automatically receive new signals from any one of newly added cameras. Producing clear audio affect and stable video effect.
- Being able to hooked up to 4 cameras and sending signals simultaneously.

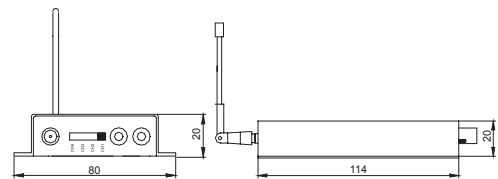

**Specification**

Model	MRX-2400B	MRX1200B
Frequency (PLL) MHz	2413 , 2432 2451 , 2470	1080 , 1120 1160 , 1210
Frequency Deviation	200 kHz	
Video input	1Vp-p 75ohm	
Audio input	2Vp-p 10k ohm	
Audio sub carrier	5.5 MHz	
Power input	Li-Ion Rechargeable Battery 3.7V(900mAh) or DC 5 V	
Batter charge time	2.5 Hrs	
Operating currier	360 mA	
Operating temperature	-10 ~ 40 Degrees C	
Operting humidity	20 ~ 80%	
Dimension (mm)	110 x 67 x21.5	
Weight (g)	117	



MRX-(2400,1200)B