


Update VRM-100 Firmware Instruction

1. When updating firmware, please check if it is the correct firmware version.
2. Check if SD card format is FAT32.

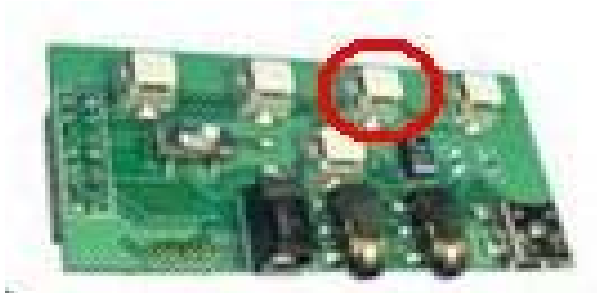

3.
 - When updating firmware, please create a MISC folder at main menu, and make sure the MISC folder contains "isp_st.bin" , "VRM1000.BIN" files.
 - Continuously press the button in above-mentioned red circle while turning on VRM-100, keep pressing that button until green & red led light flashes, then release the button.
 - Wait until the led light appears constant red color, which means the update is completed.
 - Wait 3 seconds before restarting VRM-100 to load new firmware version.